



# MX-600

- 9 mph (14 km/h) speed
- 81 in (205 cm) turning radius
- 600 lb (272 kg) load capacity



Shown with optional front headlight.

## MOBILIZING YOUR MAINTENANCE PERSONNEL



Taylor-Dunn's MX-600 Maintenance Expediter provides a mobile workshop for maintenance workers thus improving repair and maintenance productivity by reducing travel time to the service site.

The MX-600's standard features include lockable 5-drawer tool chest, work bench, vise, lockable storage cabinet, brake light, battery status indicator, tiller-loop steering, portable charger, electric horn and an all-welded steel unitized body and frame.

Optional equipment available to customize your vehicle are steel cab, roll down enclosure, geared steering, strobe light on a pole, head and tail light and various hitches.

Visit our website for images, videos, information, and custom modification ideas at [taylor-dunn.com](http://taylor-dunn.com).

<b>VOLTAGE</b>	24 volt	
<b>SPEED</b>	9 mph	14 km/h
<b>RANGE</b>	up to 20 mi	up to 32 km
<b>TURNING RADIUS</b>	81 in	205 cm
<b>LOAD CAPACITY</b>	600 lb	272 kg
<b>TOW CAPACITY</b>	2000 lb	907 kg

\* Based on Standard Configuration Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.  
Note: Photos are shown with optional features.

### FEATURES & BENEFITS:


- Increases maintenance productivity
- Improves plant safety
- Increases labor utilization
- Reduces equipment downtime



# MAINTENANCE EXPEDITER


## PERFORMANCE

<b>LOAD CAPACITY</b>	600 lb (272 kg)
<b>TOW CAPACITY</b>	2000 lb (907 kg)
<b>MAX SPEED</b>	9 mph (14 km/h)
<b>TURNING RADIUS</b>	81 in (205 cm)

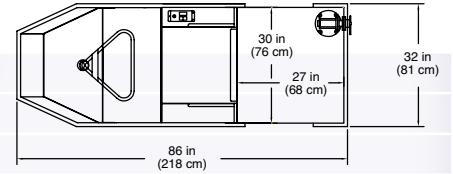


## DIMENSIONS

<b>OVERALL LENGTH</b>	86 in (218 cm)
<b>OVERALL WIDTH</b>	32 in (81 cm)
<b>HEIGHT (- cab)</b>	41 in (104 cm)
<b>HEIGHT (+ cab)</b>	69.5 in
<b>DECK HEIGHT</b>	36 in (91 cm)
<b>WHEEL BASE</b>	55.5 in (140 cm)
<b>DECK SIZE</b>	30x27 in (76x68 cm)

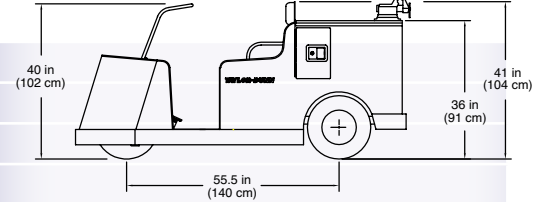

## POWER SUPPLY / DRIVE TRAIN

<b>MOTOR</b>	24V, 1400 rpm, DC, Series Wound, 4.5 hp
<b>SYSTEM VOLTAGE</b>	24V DC
<b>TRANSMISSION</b>	Transaxle assembly, sealed helical gear, 13:1 reduction
<b>BATTERIES</b>	Four, 6V, 210 amp-hour, lead acid
<b>CHARGER</b>	Portable, 24V, 25 amp, automatic, SCR control
<b>CONTROLLER</b>	275 amp, 24 volt, solid state speed controller
<b>WIRING</b>	Modular harness design, weather protected connectors

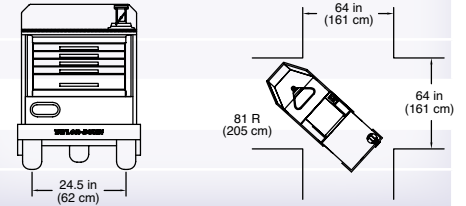

## CHASSIS

<b>FRAME</b>	Heavy duty 14 gauge, smooth skin, unitized steel body, 5-drawer steel lockable tool chest, lockable storage cabinet, work bench and vise
<b>STEERING</b>	Tiller loop, manual
<b>DRIVE AXLE</b>	Direct drive
<b>SUSPENSION</b>	Front fork with dual springs
<b>BRAKES</b>	Mechanical rear drum, foot-operated parking brake
<b>TIRES</b>	4.80 x 8 load range B, pneumatic

## GENERAL

<b>UNIT WEIGHT</b>	890 lb (404 kg)
<b>SEAT</b>	Seat cushion with full back rest, Black vinyl, safety interlock seat switch
<b>INSTRUMENTATION</b>	Battery status indicator, forward/reverse selector, key switch, electric horn
<b>LIGHT ACCESSORIES</b>	Brake light
<b>CONFORMANCE</b>	Type E OSHA 1910.178, ANSI B56.8

## OPTIONS

- HOUR METER
- MOTION ALARM
- 225 OR 260 AMP BATTERIES
- BUILT IN CHARGER
- SURREY TOP
- BATTERY WATERING SYSTEM
- SOFT SOLID TIRES
- HEAD/TAILLIGHT
- STEEL CAB
- ROLL DOWN ENCLOSURE
- UNDERCOATING/GALVANIZING
- SIDE VIEW MIRRORS
- STROBE LIGHT
- REVERSE ALARM
- VARIOUS HITCHES
- NON-MARKING TIRES
- FRONT BUMPER
- GEARED STEERING
- OPTIONAL PAINT COLORS
- KEYED UNLIKE

Specifications, standard equipment, accessories and modifications are subject to change without notice.